




序号 No.	主要技术参数 Main Technical Specification	型号 Type	
		TJ-7.2/400B	
电气参数 ELECTRIC RATINGS			
1	额定电压 Rated Voltage	kV	7.2
2	额定电流 Rated Current	A	400
3	额定频率 Rated Frequency	Hz	50/60
4	额定短时(1分钟)工频耐受电压 Rated Short-time(1min) Power-Frequency Withstand Voltage	kV	20
5	触头自闭力下的回路电阻 Circuit Resistance At Contact Force From Atmosphere	$\mu\Omega$	≤ 80
6	雷电冲击耐受电压 Lightning Impulse Withstand Voltage	kV	60
7	额定关合能力 Rated Making Capacity	kA/100Times	4, 50(带熔断器)
8	额定开断能力 Rated Breaking Capacity	kA/25Times	6
9	极限开断能力 Limited Breaking Capacity	kA/3Times	6
10	额定短时耐受电流, 4秒 Rated Short-time Withstand Current, 4s	kA	6
11	额定峰值耐受电流 Rated Peak Withstand Current	kA	10
寿命 LIFE			
1	机械寿命 Mechanical Life	Times	1,000,000
2	电寿命 Electrical Life	Times	200,000
3	储存时间 Storage Life	years	20
4	触头允许磨损厚度 Contacts Erosion Limit	mm	1
机械数据 MECHANICAL DATA			
1	触头自闭力 Contact Force From Atmosphere	N	53 ± 7
2	触头反力 Counterforce of Contacts at Full Stroke	N	73.5 ± 9.5
配套的真空开关设备应满足的机械参数 MECHANICAL DATA OF VACUUM SWITCH EQUIPPED WITH THE INTERRUPTERS			
1	触头开距 Contact Stroke	mm	4.8 ± 0.5
2	超行程 Overtrave	mm	2 ± 0.3
3	平均分闸速度 Average Opening Speed	m/s	0.5~0.7
4	平均合闸速度 Average closing speed	m/s	0.1~0.25
5	触头合闸弹跳时间 Contact Bouncing Duration at Closing Operation	ms	≤ 2
6	额定触头压力 Rated Added External Contactfinal Force	N	120



TJ-7.2/400B

接触器用真空灭弧室

Vacuum Interrupter For Contactor

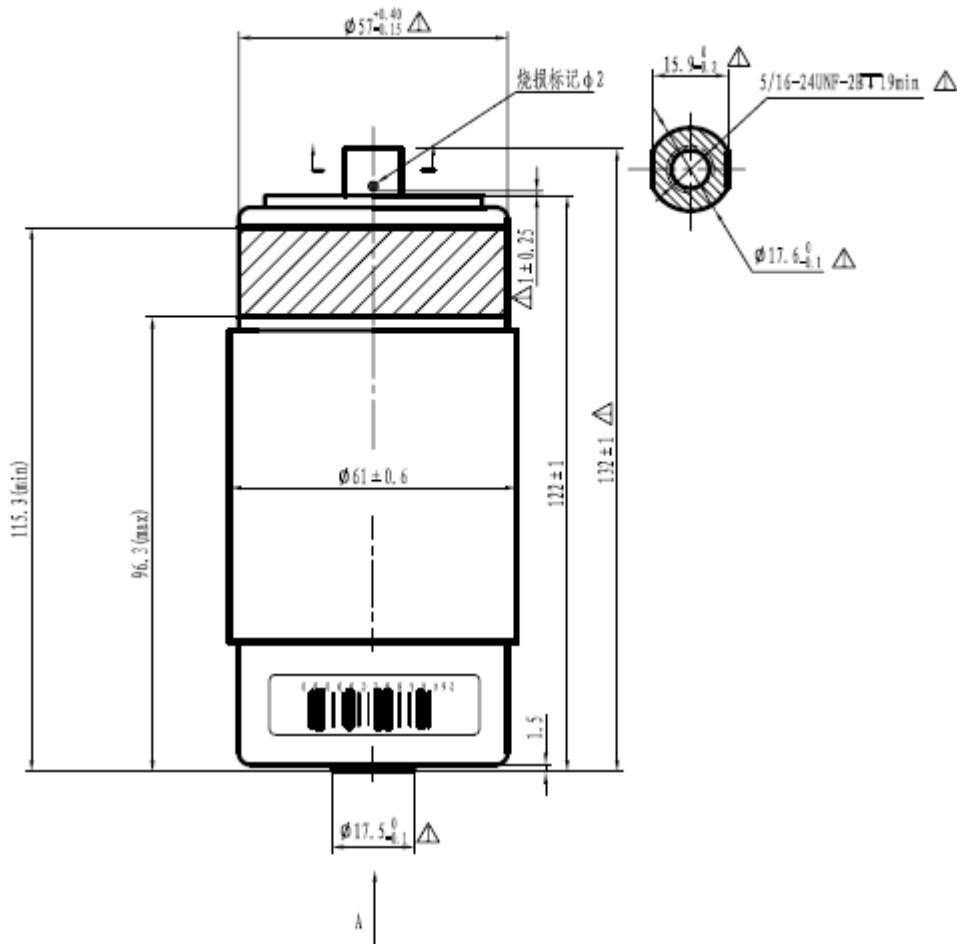

AA BB CC DD 000 (生产编号)

- 其中: AA—年份
- BB—月份
- CC—日期
- DD—当日上线生产的第几批次
- 000—序列编号

